

MOTORISED SLIDING GATE "RESIDENTIAL"



M O T O R

CSG-300




FEATURES

1. Maximum leaf weight is 300 Kgs
2. Maximum leaf length is 6m
3. No active safety edges on the main closing edge necessary
4. Defined drive direction control (open/close) or adjustable partial opening for pedestrian function
5. Optional safety facilities can be integrated effortlessly, e.g. warning light, light barrier.

TECHNICAL DATA

Temperature range	-20 °C to +50 °C
Nominal voltage	AC220 – 240 V
Torque	Max 11Nm
Nominal frequency	50/60 Hz
IP code	Ip45

A C C E S S O R I E S

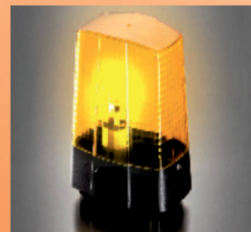


WARNING LIGHT



FINGER PRINT




PHOTOCELL

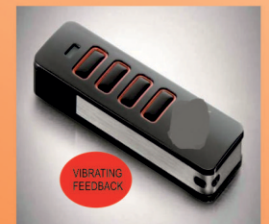

REMOTE

Preparations for assembly

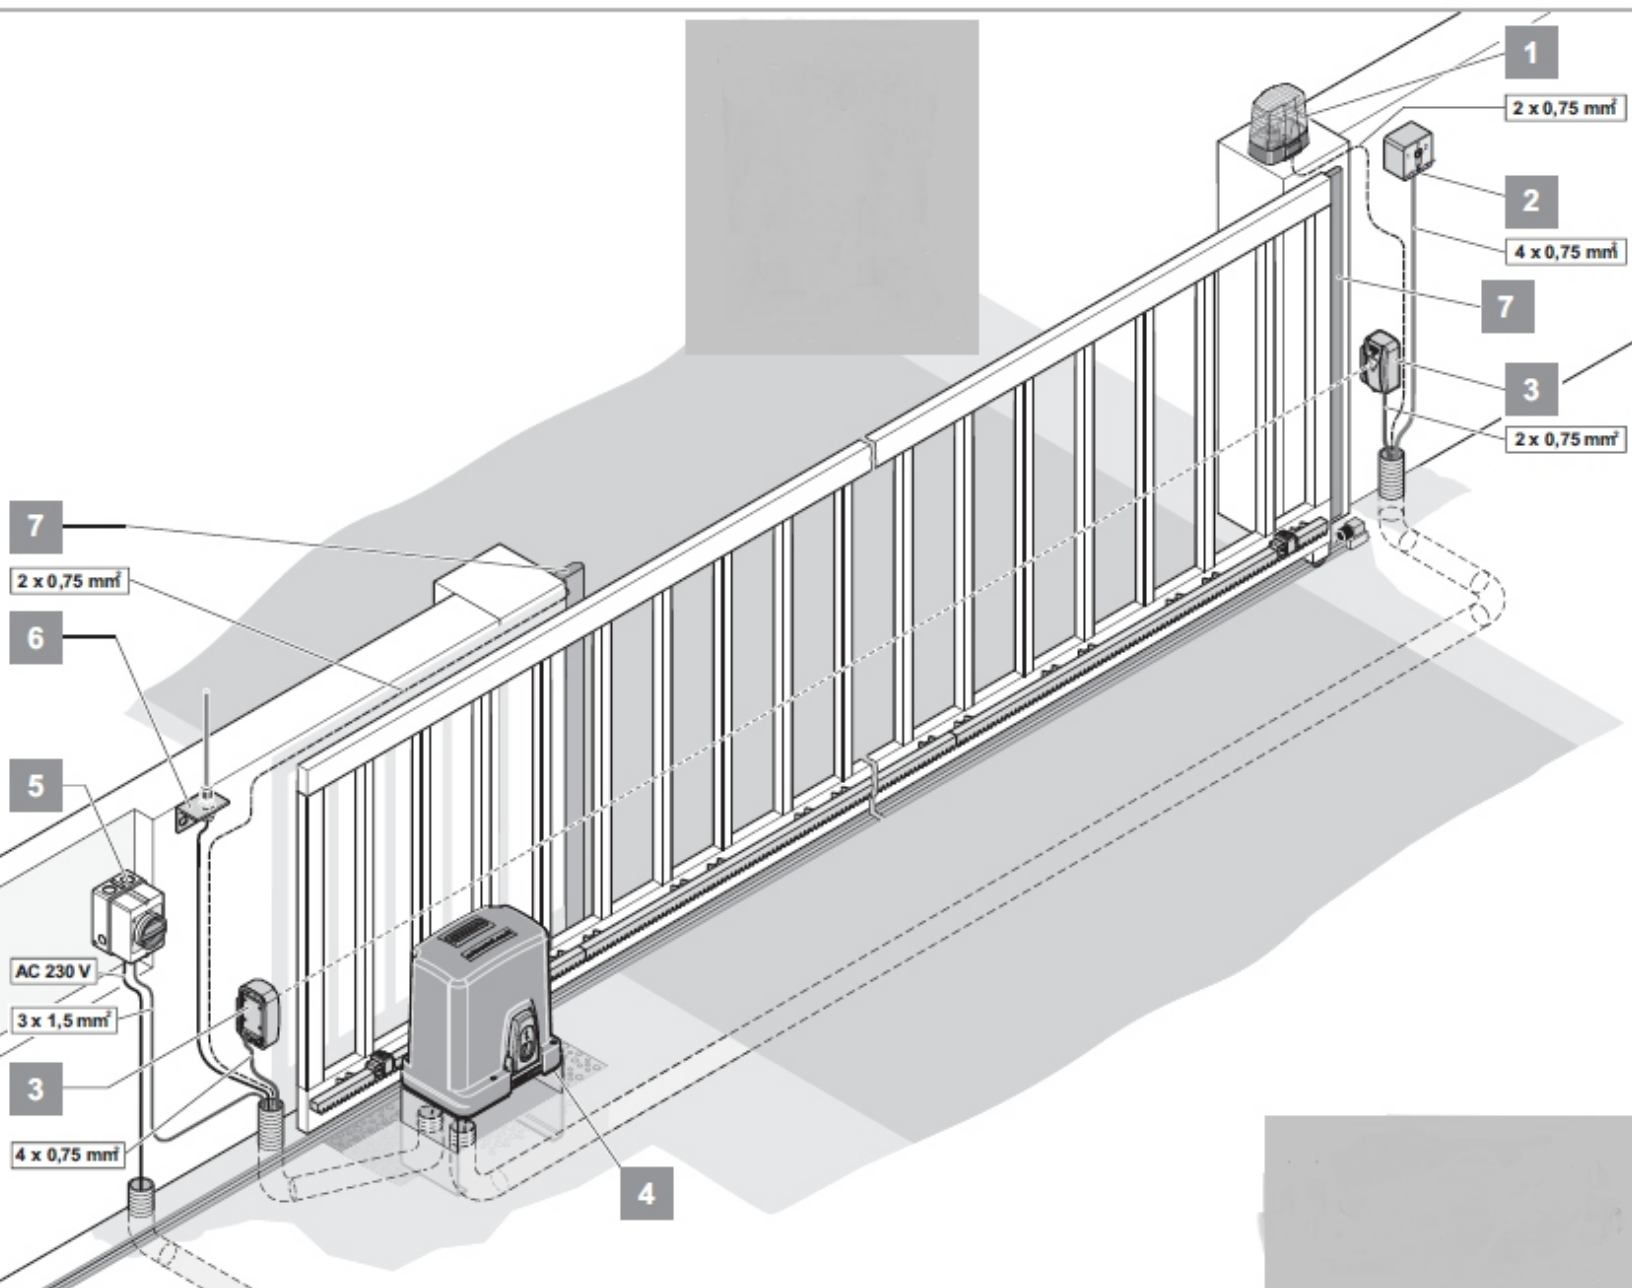

1.	Warning light DC 24 V
2.	Key switch (1 or 2 contact)
3.	Photo cell (prescribed for automatic closing, see EN 12543)
4.	Console
5.	Main switch (lockable)
6.	Rod antenna (including 10 m cable)
7.	Safety contact strip (8.2 kohm, Fraba system)