

MOTORISED SWING GATE "RESIDENTIAL"



M O T O R

CST-350



FEATURES

1. Maximum weight is 350Kgs per leaf
2. Maximum length is 5m width per leaf
3. Self-locking without electric lock (up to 5m)
4. Microprocessor control unit with a wide variety of setting options, such as pedes trial leaf function.
5. Optional safety facilities can be integrated effortlessly, e.g. warning light, light barrier.

TECHNICAL DATA

Temperature range	-30 °C to +70 °C
Nominal voltage	AC220 – 240 V
Lift (per operator)	450 mm
Nominal frequency	50/60 Hz
IP code	IP44

A C C E S S O R I E S




WARNING LIGHT



FINGER PRINT




PHOTOCELL



REMOTE

Installation

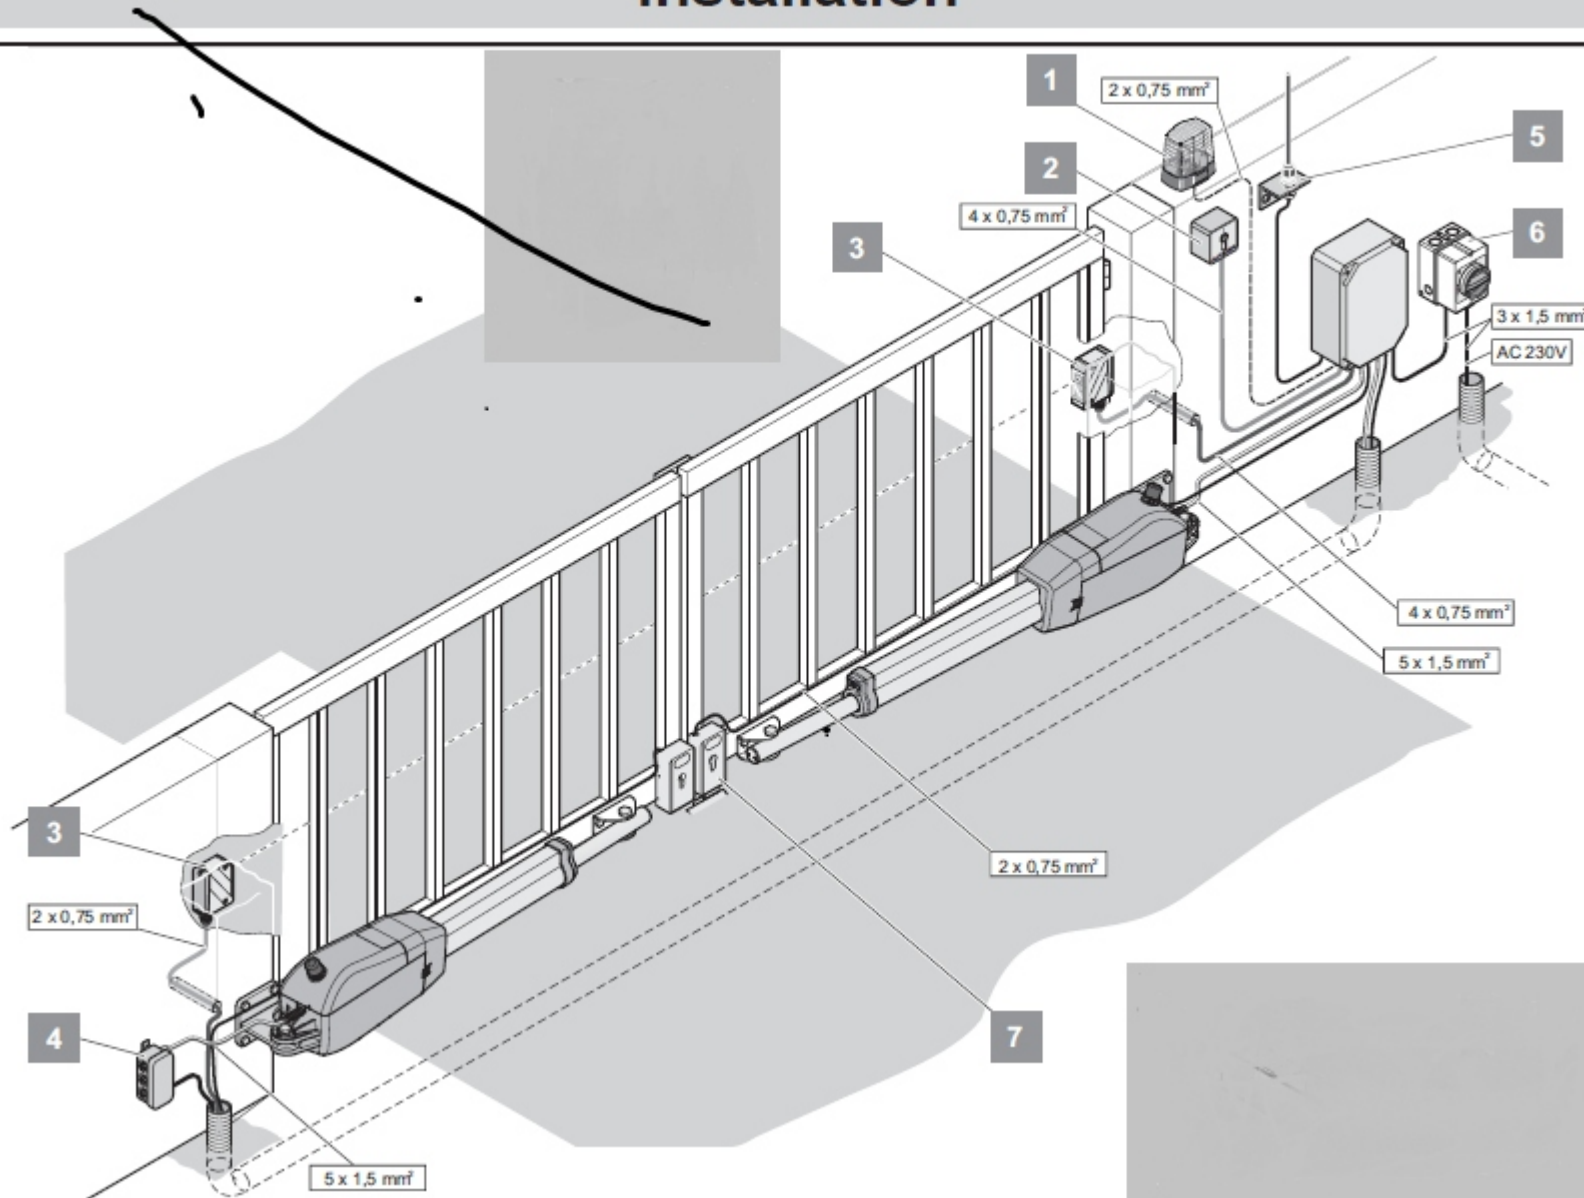

1.	Warning light DC 24 V / 24 W
2.	Key switch (1 or 2 contact)
3.	Photo eye
4.	Connector wiring set 7 m
5.	External antenna (including cable)
6.	Main switch (lockable)
7.	DC 24 V electric lock / An electric lock can be connected to each gate leaf